

TRACE-SAFE® TS-19-IL-LC-C
LOCATING CLIP W/ CAP, TYP.
(OR APPROVED EQUAL)

4" PVC CAP. SEE
PLAN VIEW BELOW.,
GLUE TO 4" PVC PIPE

CONNECT BLACK GROUND
WIRE TO TRACE-SAFE®
WIRE OR "PIG-TAIL" WITH
TS-12-19-IL
(OR APPROVED EQUAL)

LOOP TRACE-SAFE® AND
BLACK GROUND WIRE
AROUND 4" PVC PIPE


18"

4" PVC PIPE

BLACK WIRE TO
GROUNDING ANODE

BLUE HDPE COATED 19 AWG
TRACE-SAFE® TRACING WIRES,
OR APPROVED EQUAL

SECTION VIEW

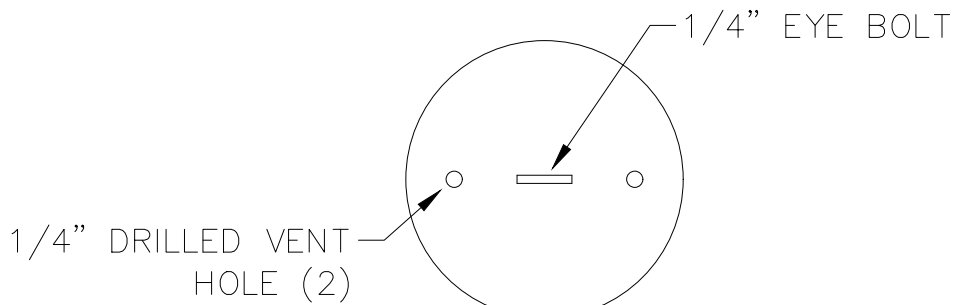

PLAN VIEW
4" PVC CAP

NOTES:

1. FOR END OF TRACER WIRE RUN, ONLY INCLUDE ONE TRACER WIRE AND ONE ANODE WIRE.

N:\Standards\2024\Details\DWG\310_Locate Station Closeup.dwg, 6/13/2024 10:46:26 AM



TUALATIN VALLEY
WATER DISTRICT

APPROVED BY
PETER BOONE

DRAWING SCALE
NONE

LOCATE STATION CLOSEUP

EFF. DATE 07/01/24

STANDARD DETAIL

310